


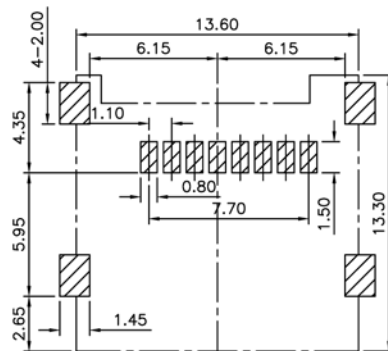
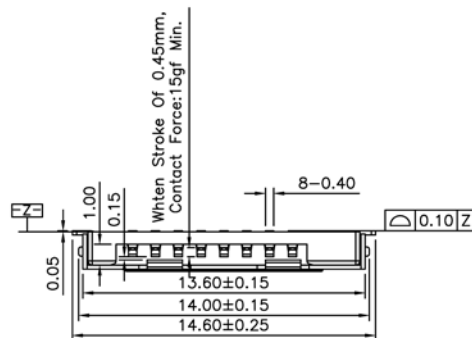


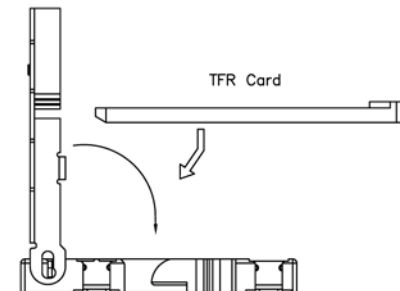

Recommended P.C.B Layout(Top Side)
P.C.B Thickness = 1.20mm (Tolerance= ± 0.05)

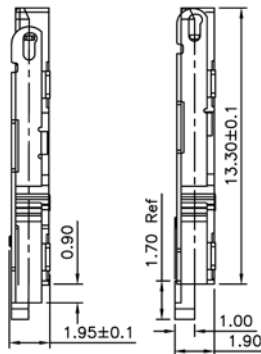

Connector Center
Area For Vacuum

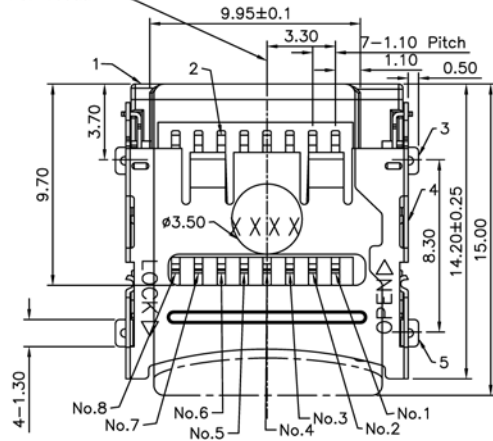

Pin No.	Name	Type	Description
1	DAT2	I/O/PP	Data Line [bit2]
2	CD/DAT3	I/O/PP	Card Detect Data Line [bit3]
3	CMD	PP	Command Response
4	VDD	S	Supply Votage
5	CLK	I	Clock
6	VSS	S	Supply Voltage Ground
7	DAT0	I/O/PP	Data Line [bit0]
8	DAT1	I/O/PP	Data Line [bit1]

RoHS Compliant

NO	Descrption	Material	Finish& Remark
5	Peg 2	Coppep Alloy	Tin Plated
4	Shell	Coppep Alloy	Nature
3	Peg 1	Coppep Alloy	Tin Plated
2	Contact	Coppep Alloy	Gold Flash
1	Housing	High Temp	Black UL94-V0